




SA-102 *In-wall Switch With Power Meter built-in Z-wave Plus*

- Works with Smart Home IoT kit
- Up to 1560W resistive Load for dual relay
- Overload protection
- With on/off control scheduling
- Power consumption monitoring
- Act as Z-wave repeater automatically
- Longer Z-wave signal transmission
- AES 128 bit Z-wave encryption

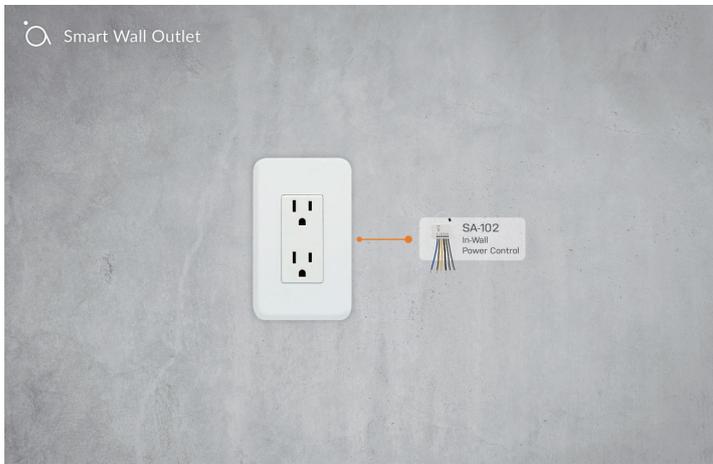

Smart Wall Outlet

Install the SA-102 in-wall power control into your wall outlet, it instantly become an intelligent device. You can check how much power you use and turn the appliance on or off.

Power Scheduling

Not only you can check how much power is consume, you can also set the schedule when the power is available. This allow you to do parental control on the TV or Internet router schedule.






Voice Control

Voice Control

The SA-102 works with Amazon Alexa or Google Home. Simply ask Alexa or Google home to turn on or turn off the plug that is connected to the home appliances.

Z-Wave Plus Technology

The Z-Wave plus is the best choice for smart home with its interference free frequency and MESH architecture. These technology insure reliable, energy saving and uninterrupted connection for your smart home devices. The SA-102 is also a Z-Wave Plus repeater which repeat the signal to make signal coverage wider.

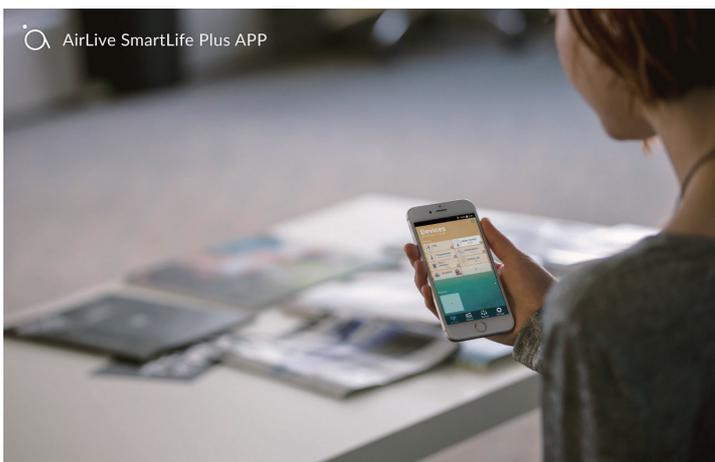

AirLive SmartLife Plus APP

AirLive SmartLife Plus APP

The SmartLife Plus APP puts everything together in your smart home. You can view the reading or video of your device. The Scene manager let you design lighting and action for each room and occasions. The Macro allow you to set "If this then that" action. It allows you to tailor made your smart home to your need.

Specifications

Model	SA-102 In-wall Switch With Power Meter built-in Z-wave Plus
Z-Wave Standard	Z-wave plus
Z-Wave Frequency	CE : 868.40 MHz, 869.85 MHz
	FCC : 908.40 MHz, 916.00 MHz
Maximum transmission distance	40 M (Indoor)
Power overload	7.5 A
Supply Voltage	90 ~ 240 VAC
Maximum Output Current	6.5 A (Resistive Load)
Maximum Output Power	1560 W (Resistive Load) X 2
Maximum Measurement Error	3 W
LED Indicator	1 Red LED

Dimension and Environment

Dimensions	47.5(L) x 39(W) x 15.6(H) mm
Operating Temperature	0 ~ 40° C
Storage Temperature	85% RH max

Ordering Information

Model	SA-102 In-wall Switch With Power Meter built-in Z-wave Plus
-------	-------------------------------------------------------------

Standard Package

Package Size	13.1 * 6.2 * 3 cm
Product Weight	0.045 kg
Package Weight	0.065 kg
Package Content	SA-102 * 1