



## SI-101 3-in-1 sensor Door/Window + Illumination + Temperature Z-Wave Plus

- Z-wave Plus technology
- Works with Smart Home IoT kit
- Including the door sensor, temperature sensor and illumination sensor
- High Z-wave output power with lower electricity consumption
- AES 128 bit Z-wave encryption
- 1700mA CR123A lithium battery
- Tamper Proof Protection
- Low Battery indication




### A sensor for door / window / Temperature / Illumination

Secured and Comfortable living life.  
 Support door/window detection.  
 Support illumination and temperature detection.  
 Small size and long battery life.  
 Possible to place the Sensor in almost any locations.  
 Use the AirLive SmartLife Plus APP to control the sensor and read out the current temperature and receive warning notifications when a door or window is opened.

### Automation Life available

By using the AirLive SmartLife Plus app you can control and read the information from the SI-101 3 in 1 sensor. See the Temperature and the Temperature changes, See the Light level and the history.

It is also possible to see when a door or window was opened and receive a notification. Setup a Macro were by when the Temperature reaches a certain level a fan will turn on.

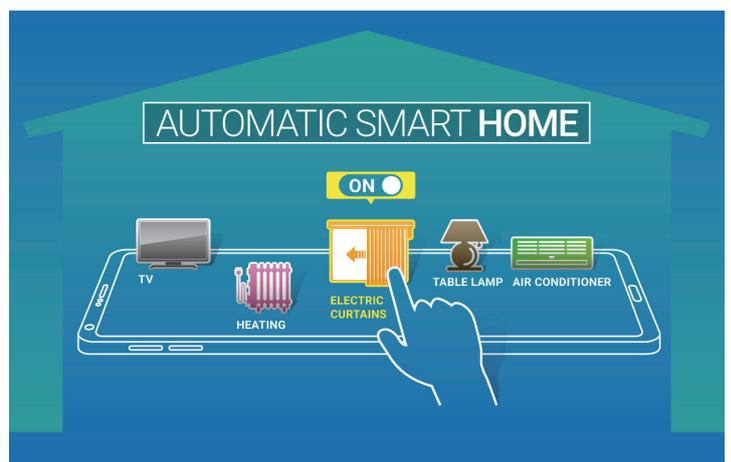



## Secure your home 24/7

Use the AirLive SI-101 for Security. When a door or Window is opened the sensor is triggered and the SG-101 will sound the siren. A notification will also be sent. Or set it up so you know when someone comes into the door and a welcome bell is heard.

## Detect your weather conditions

Let the SI-101 help you to know the weather situation now. You can put the sensor in any location of your home, then see the illumination and temperature easily, and set actions like automatically turn light on/off, or send the notification to your mobile immediately.



## Specifications

Model	SI-101 3-in-1 sensor Door/Window + Illumination + Temperature Z-Wave Plus
Z-Wave	Z-wave plus
Z-Wave Frequency	CE : 868.40 MHz, 869.85 MHz FCC : 908.40 MHz, 916.00 MHz JPN : 922 MHz ~ 927 MHz
Maximum transmission distance	40 M ( Indoor )
Door Sensor Magnetic Gap	3 mm
Temperature Sensor Detected Range	-10 ~ 70° C
Illumination Range	Illumination Range 0 ~ 500 Lx
Power	Built-in Battery (CR123A 1700 mA)

## Dimension

Detector Dimension	96(L) x 28(W) x 23(H) mm
Magnet Dimension	50(L) x 12(W) x 10(H) mm

## Ordering Information

Model	SI-101 3-in-1 sensor Door/Window + Illumination + Temperature Z-Wave Plus
-------	---

## Standard Package

Package Size	13.1 * 6.2 * 3 cm
Product Weight	0.075 kg
Package Weight	0.095 kg
Package Content	SI-101 * 1