

600W Managed Gigabit PoE+ switch

52-Port PoE+ Gigabit including 4 Ports 10G SFP+

POE-XGS4804M-600

airlive®



IGMP/ERPS Ring
Network

VLAN Policy
Voice

PoE Watchdog
and Timing

High PoE
Power 600W


Auto detect
and Power PD

SFP+ Fiber
Long Distance

Overview

SNMP & PoE managed Switch with Advanced VLAN Policy for Voice | Data

The AirLive POE-XGS4804M-600 is an L2+ managed 52-Port Gigabit PoE+ switch including 48 PoE ports and 4 10G SFP+ ports with high 600W PoE power. Each PoE port is 802.3at/af compliant of up to 30W, automatically adaptive. It supports comprehensive SNMP management function such as IGMP ERPS Ring Network, VLAN Division, Port aggregation, QoS port mirroring, bandwidth control. Providing VLAN Division Policy function for setting higher priority for Video Voice, or data that prevents package loss or lags. Furthermore, the PoE watchdog can detect, and restart crashed IPCAM or PD, the best 24/7 PoE device guard. No manual is required, and it can provide timely and reliable solutions for later operation and maintenance of the projects.

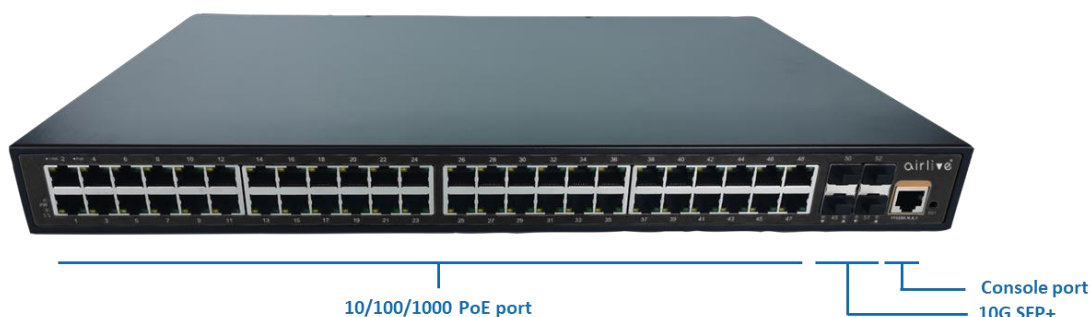

Features


- All 48 Ethernet ports delivers Gigabit high speed
- High Uplink Speed with 4 SFP+ slots that accept fiber transceivers and work at 10G
- 600W High PoE power, ensure full power for connected device
- Automatically detect and offer power for connected PD
- Support L2+ SNMP and WEB Smart management function, including DHCP Snooping, VLAN, IGMP, QoS, Spanning Tree, MAC Binding and Bandwidth Control
- Voice VLAN support for high priority transmission
- PoE watchdog support to detect and restart connected PD
- Clear Statuses display including traffic, CPU, POE consumption, per-port status
- Web-UI for easy management; CLI and Command Script for advance setting; SNMP used for popular network tools management.

Major Specifications

- 48 x 30W PoE 10/100/1000
- 4 x 10G SFP+
- 802.3at/802.3af compliant
- Each port up to 30Watts; PoE Power 600W
- Lighting Surge ESD protection: 6KV / Port ESD Static Protection: 15KV /Switch
- L2 SNMP v1/2/3
- PoE management, PoE Watchdog
- Authentication: 802.1x, AAA
- SNMP, WEB, CLI, SSH2.0, Telnet
- VLAN Division Voice
- DHCP Snooping prevents unauthorized router installed

Efficient PoE Watch Guard PoE Watch dog technology and PoE Management

The 600W PoE powered Switch, POE-XGS4804M-600 will detect and provide full power to connected PD adaptively automatically. Moreover, it features PoE Watchdog technology that can automatically detect connected PD and restart the crashed devices. For example, when “PoE Watchdog” function is turned on, the switch auto-detects the front-end camera for 24/7. If there is no traffic output from the camera, it is judged that the camera is frozen, and the front-end camera is restarted through PoE power failure to solve the problem of camera crash. No manual operation is required, and it can provide timely and reliable solutions for later operation and maintenance of the system.

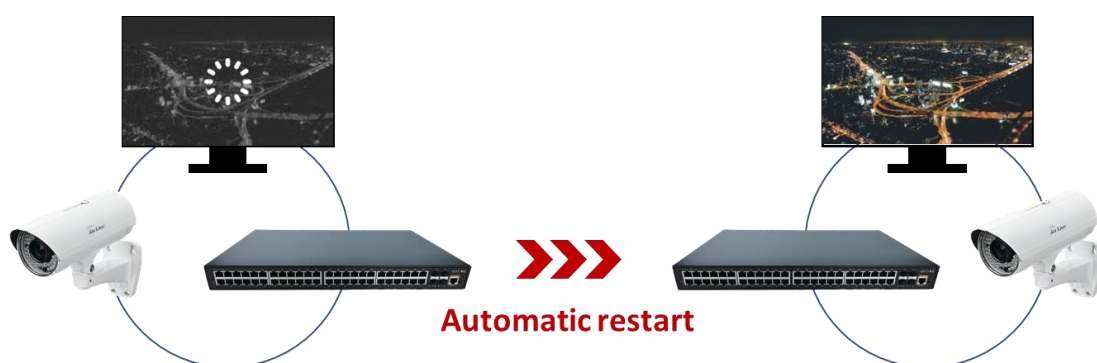


ERPS Ethernet Ring Protection

ERPS is supported by the POE-XGS4804M-600 Switch. ERPS supports multi-ring and multi-domain structures (master and sub rings) and optimizes the inspection mechanism in terms of two-way faults. In addition, it supports main device backups, load sharing and other work methods in <20ms switching.

This means that when multiple switches have been placed in a Ring and the network work is interrupted, it will recover within 20ms or less. Meaning the critical network like in harsh environments or automated production lines and surveillance will be online again with minimum loss of time. The ring network is also protected again loops.

ERPS Ethernet Ring Network with Recovering Time < 20ms

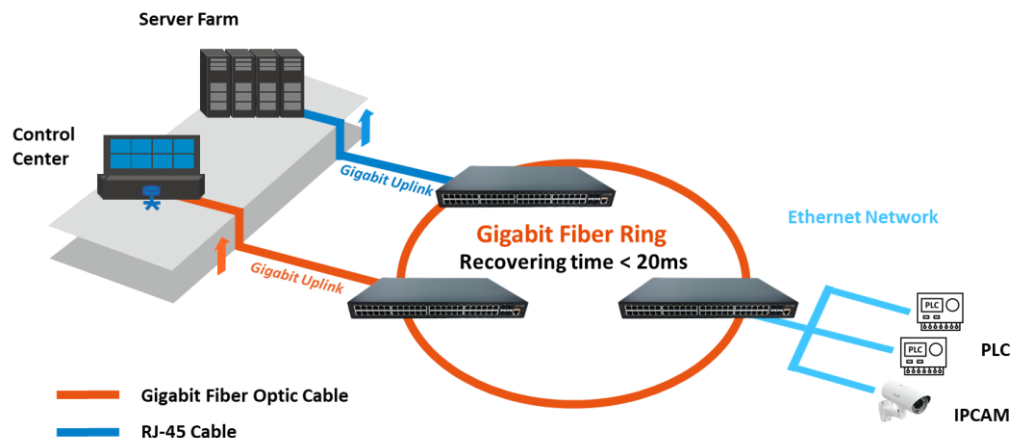

VLAN Policy for Voice

User can define policy for voice data in high priority, to ensure your voice data will not lag coursing by any networking jam.

Voice VLAN Configuration

Mode	Disabled	▼
VLAN ID	1000	
Aging Time	86400	seconds
Traffic Class	7 (High)	▼

Port Configuration

Port	Mode	Security	Discovery Protocol
*	<>	<>	<>
1	Disabled	Disabled	OUI
2	Disabled	Disabled	OUI
3	Disabled	Disabled	OUI
4	Disabled	Disabled	OUI

Save Reset

DHCP Snooping Support

Managing DHCP server; prevent stranger / Hacker.

DHCP Snooping Configuration

Snooping Mode: Enabled ▼

Port Mode Configuration

Port	Mode
*	<>
1	Trusted
2	Untrusted
3	Trusted
4	Trusted
5	Trusted
6	Untrusted
7	Trusted
8	Trusted
9	Trusted
10	Trusted

Thermal Protection Configuration

Thermal protection is for detecting and protecting the working switch. When the switch detected the port temperature is higher than defined temperature, the system will disable the port, to protect switch itself. This switch support 4 Thermal Protection priority groups, and each of them can have a defined temperature for protection.

Thermal Protection Configuration

Temperature settings for priority groups


Priority	Temperature	
0	255	°C
1	255	°C
2	255	°C
3	255	°C

Port priorities

Port	Priority
*	<> v
1	0 v
2	0 v
3	0 v

Fiber for Long Distance

Extend the network further with the SFP+ slots. The SFP+ ports also supports DDM which offers more information about the fiber connection and makes it easier to find any faults or bad connections.

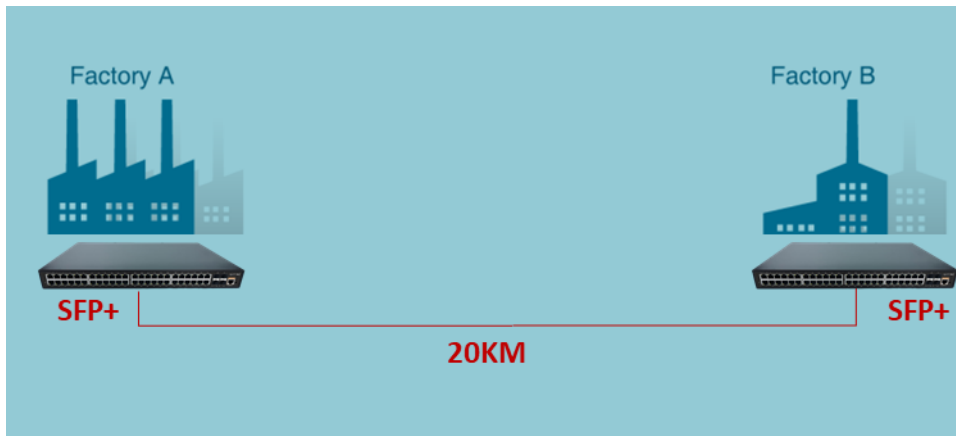

Model	AirLive POE-XGS4804M-600
<p>Hardware</p> <ul style="list-style-type: none"> • Device Interface: 48 x 30W PoE 10/100/1000 RJ45 4 x Ports 10G SFP+ 52-Port totally 1 x RJ45 console port • Standard IEEE802.3u 100Base-TX / 100Base-FX IEEE802.3ab Gigabit 1000Base-T IEEE802.3ae 10GBase IEEE802.3z Gigabit SX/LX (optical fiber) IEEE802.3x Flow Control and Back Pressure IEEE802.3ad Standard method for performing link aggregation IEEE802.1d Spanning Tree (STP) IEEE802.1w Rapid Spanning Tree (RSTP) IEEE802.1s Multiple Spanning Tree (MSTP) IEEE802.1p Class of Service (QoS / CoS) traffic Prioritization (Multicast filtering function) IEEE802.1Q VLAN Bridge Operation IEEE802.1x Client/Server Access control and Authentication IEEE802.3at/af PoE IEEE802.3az Energy Efficient Ethernet • LED Indicators: PWR (power supply), SYS(System), PoE (Indicator), Link (Indicator), Fiber (Indicator). • Lighting Surge Protection: 4KV 8/20us (general mode) • Mechanical Solid metal 19" 1U rack-mountable, IP30 <p>Power and PoE</p> <ul style="list-style-type: none"> • Protocol: IEEE802.3at (30W), IEEE802.3af (15.4W) • PoE Port: 48 • PoE Power Output / PoE Port: max. 30 watts • PoE Power Output / PoE switch: max. 600 watts • Power Input: AC100~240VAC, 600W <p>Switch Architecture Performance</p> <ul style="list-style-type: none"> • Switching architecture: Store and Forward Switch Capacity: Back-plan up to 598Gbps (non-blocking) Forwarding Rate@64byte; 107.14Mpps MAC Address: 32K Buffer Memory: 32Mb • Fiber Medium: Multi-mode Fiber: 850nm (300m-10G), (500m-1.25G) Single-mode Fiber: 1310nm, 1550nm <p>ERPS Ethernet Ring Protection</p> <ul style="list-style-type: none"> • Support G.8032 (ERPS), support 255 loops at most, and supports 1024 devices per ring. • The self-healing time of the ring network is less than 20ms 	<p>L2 Management Function</p> <ul style="list-style-type: none"> • Port Management: Enable / Disable Port Speed, Duplex, Flow-Control Port Information Check, Temperature protection setting • Port Mirroring: Support both side-way port mirroring • Port Isolation: Support the downlink port isolation, and able to communicate with the uplink port • Storm Suppression: Support unknown unicast, multicast, unknown multicast Broadcast type storm suppression Storm suppression based on bandwidth regulation and storm filtering • Port Aggregation: Support LACP Support Static Polymerization Support the largest 8 aggregation groups, each aggregation group supports 8 ports • VLAN: Support port based VLAN (4K), Support protocol based VLAN Support Access, Trunk, Hybrid three types of port configuration Support QinQ configuration Voice VLAN • MAC: Support static addition, deletion Dynamic aging time setting • Spanning Tree Support STP 802.1d Spanning Tree protocol Support RSTP 802.1w Spanning Tree protocol Support MSTP 802.1s Spanning Tree protocol • Multicast: Support IGMP-Snooping Support MLD-Snooping Support multicast VLAN Support the user's quick departure mechanism • DDM: Support SFP+ DDM • Layer 3 function: Support L2+ managed function, Support IPV4/IPV6 management Support Layer3 soft routing (weak three tier) forwarding, Support different network segments, communication between different VLAN Support static routing / default routing 128, 1024 ARP software forwarding

* Specification will be changed without prior notice



Model	AirLive POE-XGS4804M-600
<p>L2 Management Extension Function</p> <ul style="list-style-type: none"> • ACL (Access Control List): Support L2 to L4 packet filtering function. Based on source MAC, destination MAC, IP Protocol type, source IP, destination IP, TCP/UDP port, TCP/UDP port range, VLAN and other definition ACL Support ACL based on Port and VLAN • QoS: Diff-Serv QoS Each port supports 8 output queues Support 802.1p/DSCP priority mapping Support queue scheduling mechanism (SP, WRR, SP+WRR) Priority tag Mark/Remark Stream based packet filtering Support for stream-based redirection Support flow-based speed limit • User Settings: Support user grading management and password protection • Log: User login, operation, status, events • Network diagnosis: Support Ping, Cable Diagnostics • System Management: Device reset, configuration save/restore, upgrade management, time setting, etc. <p>System Management</p> <ul style="list-style-type: none"> • CLI: Support serial port command line management • SSH2.0: Support SSH remote management • Telnet: Support Telnet remote management • WEB: HTTPS • SNMP: SNMP V1/V2/V3 • RMON (remotely management) Support RMON1 Console/AUX Modem Support FTP, TFTP, Xmodem, SFTP file download management Support one bond reduction Support NTP clock Support system work log Support CPU instant utilization status view Support link layer discovery protocol LLDP Support NMS intelligent management center <p>System Management</p> <ul style="list-style-type: none"> Support DHCP Client Support DHCP Snooping Support DHCP Server Support DHCP Relay 	<p>Security Functions</p> <ul style="list-style-type: none"> Support IEEE802.1X authentication / centralized MAC address authentication Support AAA&RADIUS authentication Support the number of MAC address learning restrictions Support MAC address black hole Support SSH 2 to provide secure passwords for user login. Support SSL to ensure data transmission security Support port isolation Support the speed limit function of ARP message Support IP source address protection Support ARP intrusion detection function Support against DoS attacks Support port broadcast message suppression Support host data backup mechanism Binding capabilities of IP+MAC+VLAN+ ports <p>Environment</p> <ul style="list-style-type: none"> • Operating Temperature: -20°C to +55°C • Storage Temperature: -40°C to +80°C • Working Humidity: 5%~95%, non-condensing • Storage Humidity: 5%~95%, non-condensing <p>Standard package of switch</p> <ul style="list-style-type: none"> • Switch size: 44 x 29 x 4.4 cm(L*W*H) • Package Weight: N.W: <4.9kgs; G.W: <5.8KGS • Package content: 1 x Switch, 1 x Power cord 1 x Mounting bracket 1-pair (selectable) <p>Standard carton package</p> <ul style="list-style-type: none"> • Quantity: TBD pcs / 1 carton • Dimensions TBD cm • Weight TBD KGS <p>Ordering Information</p> <ul style="list-style-type: none"> • Model: POE-XGS4804M-600 • Name: L2+ Managed Gigabit PoE+ 802.3at switch, 600W 52Ports PoE including 4 x 10G SFP+ Fiber ports.

* Specification will be changed without prior notice

