

1 Port 10G XGS-PON Wi-Fi 6 AX3000 ONU

Incl. 1x 2.5G RJ45, 3x 1G RJ45, 1x USB3.0

ONU-10XGS-AX304-2.5G

airlive®



10G
XGS-PON

AX3000
Wi-Fi 6

Compliant ITU-T
G.9807.1 standard

1 x 2.5GE RJ-45
3 x 1GE RJ-45


IPv4/IPv6
Dual Stack

Realtek
Solution

USB3.0 Interface
For Shared Storage

Overview

The AirLive ONU-10XGS-AX304-2.5G is an ONU that caters to new optical fiber communication networks. It conforms to international standards ITU-T G.9807.1 (XGS-PON). The ONU comes with 1 x 2.5GE + 3 x 1GE RJ-45 ports for ultra fast connection speeds. The ONU also comes with a USB3.0 port which can be used to share USB storage. The ONU can fully meet the high access bandwidth requirements of Wi-Fi 6 technology with its AX3000 Wi-Fi network. The ONU can bring fast Internet access experience and lower Internet latency for home users and enterprise users. The ONU is specially designed to meet the needs for FTTO (office), FTTD (desktop), FTTH (home), SOHO broadband access, video surveillance, etc. It is based on XGSPON technology, with high reliability, easy maintenance, and can provide QoS guarantee for different services.

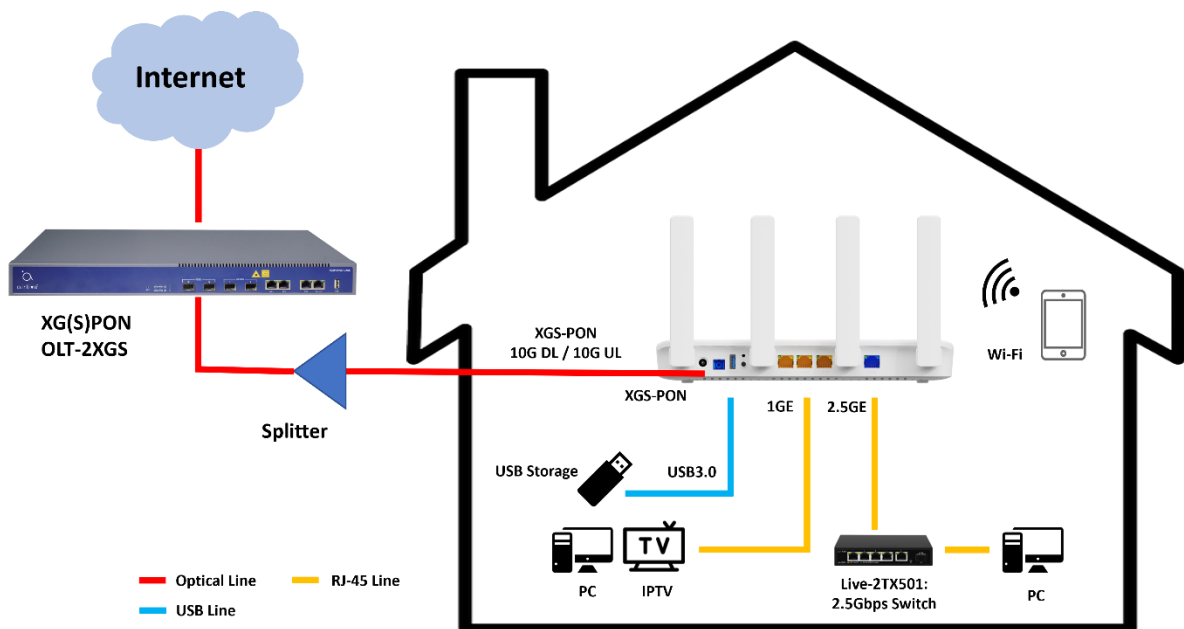

High-speed and Long-distance Coverage for Triple Play Services

The AirLive 10G XGSPON ONU offers a solution for providing high-speed and long-distance coverage. The AirLive ONU-10XGS-AX304-2.5G supports full Triple Play of services enabling Data and Video services through Ethernet, Wi-Fi and USB standard interfaces, which helps Internet Service Providers to deliver ultra fast internet service speeds of more than 2.5Gbps which is limited by slower GPON.

Triple play service applications such as HDTV, IPTV, and multimedia, enabling fast and reliable data transmission. With a large range between equipment nodes, the 10G XGS-PON ONU is a cost-effective access technology that offers flexibility for network deployment. Its reliable and scalable network ensures a seamless and efficient experience for users.

Highlight Feature

- 10G XGSPON with UL 10Gbps, DL: 10Gbps Speeds
- 1x 2.5Gbps RJ-45 Port for High-speed networking
- 3x 1Gbps RJ-45 Port
- 1x USB3.0 for Shared Storage
- Wi-Fi 6 11a/b/g/n/ac/ax compliant
- 2T2R 3000Mbps Wireless High Speed (600Mbps + 2400Mbps)

Model	ONU-10XGS-AX304-2.5G
Device Interface • PON Port: 1x 10G PON port: Class B+ • Connector: SC single mode, SC/UPC connector • Memory: 512MB DDR • TX optical power: 6dBm (XGS-PON) • RX sensitivity: -28dBm • Overload optical power: -8dBm • Transmission distance: 20km • Wavelength: XGS-PON: RX 1577nm/TX 1270nm • 10G PON layer: ITU-T G.9807.1 (XGS-PON) • XGS-PON ONU Speed: Upstream 9.953Gbps, Downstream: 9.953Gbps • LAN / USB Port: 1 x 10/100/1000/2500M RJ-45 Port 3 x 10/100/1000M RJ-45 Port 1 x USB3.0 Port (Storage) • LED: PON/LOS, WAN, USB, Wi-Fi Wi-Fi • Standard: IEEE 802.11a/b/g/n/ac/ax, 2x2, 20/40/80/160 MHz channels, FEM • Antenna: 2x 4dBi (2.4GHz), 2x 5dBi (5Ghz) external antennas • Security: WEP-64/WEP-128/ WPA/WPA2/WPA3 • Modulation: OFDMA, MU-MIMO, Dynamic QoS, 1024QAM • Wi-Fi Advanced: Wireless client isolation • Wireless Channel • 2.4G (2412-2472MHz): 1~13 (region dependent) • 5.8G (5170-5875MHz): 36~48, 36~64, 100~140, 149~165 (region dependent) • Wireless Speed: 3000Mbps Wireless High Speed (600Mbps + 2400Mbps) • Wireless TX Power 2.4G: ≤22dbm, 5.8G: ≤23dbm (region dependent) • Wireless: Multi-SSID 8 (4 per radio), Smart Connect One Wi-Fi name - One SSID for 2.4GHz and 5GHz dual band	Function features • Internet connection: Support Bridge/Router mode • Multicast: Support IGMP v1/v2/v3, IGMP snooping MLD v1/v2 snooping • L2: 802.1D&802.1ad bridge, 802.1p Cos,802.1Q VLAN • L3: IPv4/IPv6, DHCP Client/Server, PPPoE, NAT, DMZ, DDNS • Firewall: Anti-DDOS, Filtering Based on ACL/MAC /URL • Management: Support WEB/TELNET/OAM/OMCI/TR069 Support private OAM/OMCI protocol and Unified network management of AirLive OLT Power Supply • Input Voltage: DC 12V, 2A Power Adapter • Power Usages Max: ≤ 24W Environment • Operating Temperature: -0°C to +55°C • Storage Temperature: -40°C to +70°C • Working Humidity: 5%~95%, non-condensing • Storage Humidity: 5%~95%, non-condensing • MTBF: 100000 hrs. Standard package of ONU • Product size: 24.4 x 13.1 x 3.6 cm (L*W*H) • Package size: 26.5 x 23.6 x 5.6 cm (L*W*H) • Package Weight: Product N.W: 0.425kg Product G.W: tbc kg • Package content: ONU x 1, QIG x 1, Power Adapter x 1 Standard carton package • Quantity: 20 pcs / 1 carton • Dimensions 55.0 x 45.0 x 30.0cm (L*W*H) • Weight 8kg (G.W) • Ordering Information • Model: ONU-10XGS-AX304-2.5G • Name: 10G PON ONU incl. 1x XGS-PON Port, 1x 2.5G RJ-45, 3x 1G RJ-45 Port, 1x USB3.0 Port and AX3000 Wi-Fi

* Specification will be changed without prior notice

* All trademarks, logos and brand names are the property of their respective owners.

AirLive