





Installation Step:

oirlive®


- 1. Wait for approximately 45 seconds for the Router to power on.
- 2. Connect the LAN port of the Router to the network port of the computer with a network cable, or connect to the Wireless signal of the Router with a wireless network card. The default SSID is **WiFi_XXXX** (XXXX is the last 4 digits of the Router MAC address). Default Wireless Password: **12345678**
- 3. Open a browser and enter the Router IP address 192.168.188.1 Enter the setup Wizard to set the administrator password.



4. Choose in internet connection method, Auto, PPPoE or Static IP.



5. Set Wireless name and Password, Click "Save" to complete the settings.

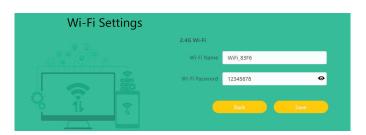

Declaration of Conformity

We, Manufacturer/Importer

AirLive Technology Corporation 4F, No.132, Lane 235, Baoqian Rd., Xindian Dist., New Taipei City 23145, Taiwan

Declare that the product

WiFi 4 N300 2.4Ghz Wireless Router N305R

is in conformity with

In accordance with RED 2014/53/EU Directive

Clause

- EN 55032:2015+A11:2020+A1:2020
- EN 55035:2017+A11:2020
- EN 61000-3-3:2013/A1:2019
- EN IEC 61000-3-2:2019
- ETSI EN 301 489-1 V2.2.3 (2019-11)
- ETSI EN 301 489-17 V3.2.4 (2020-09)

(LVD)

- EN IEC 62368-1:2020+A11:2020
- (Radio) (Radio)
- ETSI EN300 328 V2.2.2(2019-07)

Conformity with

In accordance with RoHS 2.0 Directive (EU) 2015/863 and (EU) 2017/2102 Amending Annex II to Directive 2011/65/EU.

- IEC 62321-1:2013, IEC 62321-2:2013
- IEC 62321-3-1:2013. IEC 62321-3-2:2013
- IEC 62321-4:2013+A1:2017. IEC 62321-5:2013
- IEC 62321-6:2015. IEC 62321-7-1:2015
- IEC 62321-7-2:2017, IEC 62321-8:2017

■ CE marking



Manufacturer/Importer

Name : A van Rossem Position/ Title : Product Manager Place: Taiwan Date: October 2023















