

Industrial Level 10G Multi Giga SFP+ MiniGBIC

Transceiver, Up to 300M, Hot pluggable, Auto-fall back

ISFP-SR-10G-300M

AirLive®



10G SFP+ transceiver	850nm	Up to 300M	Multi Mode Dual Fiber	Industrial-level
LC Duplex Connector	DDM Function	ESD Protection	Hot Pluggable	-40°C~+85°C

Overview

The AirLive ISFP-SR-10G-300M is a low power, high performance and cost-effective single mode Industrial level SFP+ Fiber transceiver for serial optical data communication applications up to 10Gbps and 300M in Industrial environments. The low jitter and high sensitivity module is intended for multi mode dual fiber and operates at a nominal wavelength of 850nm, the higher operating temperature from -40°C ~ +85°C makes the module ideally suited for Industrial and higher temperature areas, the module is hot pluggable.

The transceiver incorporates TX Disable control, TX-Fault, and RX_LOS monitor functions. It is a duplex LC connector transceiver designed for use in Gigabit Ethernet applications and to provide IEEE802.3ae compliant link and Class I Laser safety compliant link.

The suitable applications are such as High-speed storage area networks, computer cluster cross-connect, customized high-speed data pipes, and more.

Features

- 10Gbps Fiber Mini GBIC SFP+ Transceiver
- Multi mode SFP+ fiber
- Duplex LC connector Interface
- Wavelength 850nm VCSEL Laser and PIN photo detector
- 10Gbps high speed
- Distance up to 300M
- Low Power consumption < 1.0W
- Hot-pluggable capability
- Very low EMI
- Excellent ESD protection
- IEEE802.3ae
- Operating Temperature: -40°C ~ +85°C

Application

- Fiber Channel Infrastructure
- STM-16 Optical Interface
- ATM Switches and Routers
- SDH/SONET Switch Infrastructure

Application Environment examples

- Bank
- AirPort
- Hotel
- Expressway
- Petrochemical Industry
- Metro
- Factory

Transmitter Operating Characteristic Optical, Electrical


Transmitter					
Parameter	Symbol	Min.	Typical	Max.	Unit
Centre Wavelength	λ_c	840	850	860	nm
Spectral width (RMS)	$\Delta\lambda$	-	-	0.45	nm
Average Output Power	P_o	-5	-	0	dBm
Extinction Ratio	E_r	3.0	-		dB
Dispersion Penalty				3.9	dB
Relative Intensity Noise	RIN _{12OMA}			-128	dB/Hz
Total jitter	T_j			215	PS
Input Differential Impedance	Z_{in}	90	100	110	Ohm
Data Input Swing Differential	V_{in}	180		700	mV
TX Disable - Disable		2.0		Vcc	V
TX Disable - Enable		0		0.8	V
TX Fault - Assert		2.0		Vcc	V
TX Fault – De-Assert		0		0.8	V

Receiver Operating Characteristic Optical, Electrical

Receiver					
Parameter	Symbol	Min.	Typical	Max.	Unit
Centre Wavelength	λ_c		850		nm
Receiver Sensitivity	R_{sen}	-	-	-11.5	dBm
Receiver Overload	R_{ov}			-10.5	dBm
Return Loss		0			dB
LOS Assert	LOSA	12			dB
LOS De-Assert	LOSD	-25			dBm
LOS Hysteresis		0.5			
Output differential impedance	Z_{out}	-	100	-	Ohm
Data Input Swing Differential	V_{out}	300	-	800	mV
Rx_LOS - Assert	-	2.0	-	Vcc	V
Rx_LOS – De-Assert	-	0	-	0.8	V

Fiber for Long Distance up to 300m

Extend the network further with the AirLive network switches and fiber modules. Use the SFP+ modules in the SFP+ ports which also supports DDM and offers more information about the fiber connection and makes it easier to find any faults or bad connections.

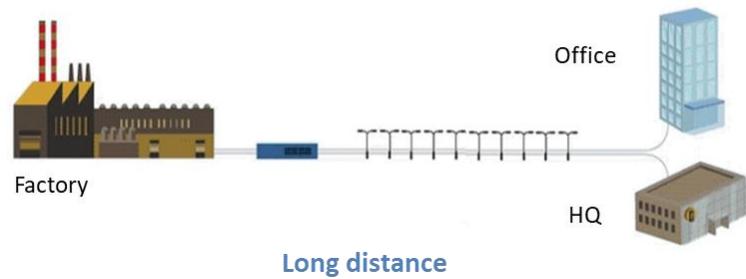

Model	AirLive ISFP-SX-10G-300M
<p>Hardware</p> <ul style="list-style-type: none"> Power Supply Voltage: 3.15V~3.45V Typical Power Supply Voltage: 3.3V Standard Compliant with IEEE 802.3ae Compliant with Digital Diagnostic SFF-8472 Compliant with IEC-60825 DDM Support ESD Protection Total Supply Current: 300mA Data Rate: 10 Gbps Power Dissipation Max 1.0 W Transmitter (Electrical - Optical) Centre Wavelength: - Min.:840nm - Typical: 850nm - Max.: 860nm Average Output Power: -5, Max -0dBm Extinction Ratio: Min: 3.0dB Operating Data Rate: 10Gbps Tx Input Differential. Voltage: - Min. 180 mV - Max. 700 mV Tx Fault Output Voltage – Assert: - Min. 2.0V - Max. Vcc Tx Fault Output Voltage – De-Assert: - Min. 0V - Max. 0.8V Receiver -Optical, Electrical Center Wavelength: - Typical 850nm Receive Sensitivity In Average Power: - Max. -11.5dBm Los Assert: 12dB Los De-Assert: -25dBm Los Hysteresis - Min. 0.5 Receiver Overload: -10.5dBm Data Input Swing Differential Voltage - Min. 180mV - Max. 700mV 	<p>Environment</p> <ul style="list-style-type: none"> Operating Temperature: -40°C to +85°C Storage Temperature: -40°C to +85°C Working Humidity: 5%~95%, non-condensing <p>Standard package of SFP</p> <ul style="list-style-type: none"> Package size: TBD mm(L*W*H) Package Weight: N.W: TBD kgs; G.W:TBD KGS Package content: 1 x SFP Module <p>Standard carton package</p> <ul style="list-style-type: none"> Quantity: 10 pcs / 1 Blister Dimensions 5.5x1.3x0.8 cm Weight TBD kgs <p>Ordering Information</p> <ul style="list-style-type: none"> Model: ISFP-SR-10G-300M Name: Industrial level 10Gbps Fiber Mini GBIC ISFP Transceiver, 850nm, LC connector, 300M, hot-pluggable

* Specification will be changed without prior notice