



SI-108 *IR Controller for Air Conditioner Z-Wave Plus*

- Z-Wave Plus
- IR Range Max. 6 Meter/ 110 degree
- Angle adjustable
- Lower power consumption
- AES 128 bit Z-wave encryption
- 1700mA CR123A lithium battery
- Maximun To 32 Keys For Self Customizing
- Low Battery indication
- Wall Mountable





Universal A/C Remote Controller

Are you always can't find the remote control of air-conditioner? Installed AirLive IR Controller, then you can control the A/C remotely just using your smartphone.

Set up Macro to do automated action

Combine with 3 in 1 Sensor, you can set the A/C be turned on at certain temperature. This keeps your home cool and comfortable when someone at home.

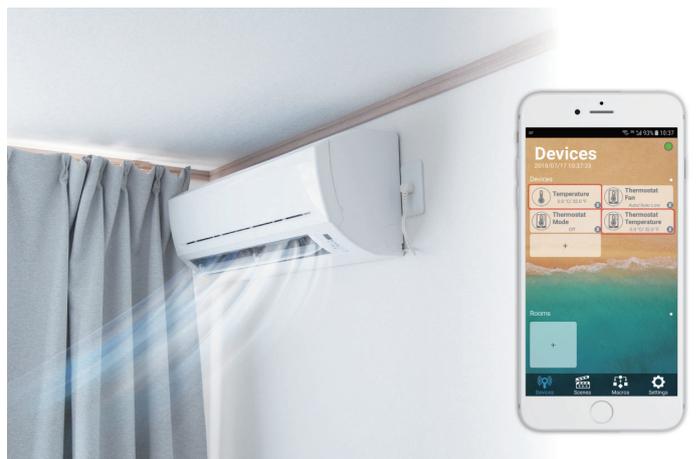

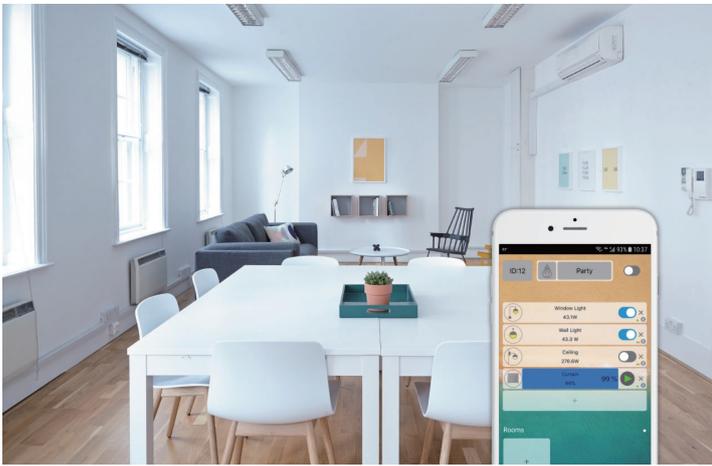

Create your theater mode!

Ready to enjoy your movie time? Simply tap a button on App or speak to your voice commands, then each device will switch on together at the same time.

Specifications

Model	SI-108 IR controller, Z-wave Plus
Z-Wave Standard	Z-wave plus
Z-Wave Frequency	CE : 868.40 MHz, 869.85 MHz
	FCC : 908.40 MHz, 916.00 MHz
Maximum transmission distance	40 M (Indoor)
IR Range	Max. 6 Meter with 110 degree
IR Control	Maximun To 32 Keys For Self Customizing AC
Power	Build in Battery (CR123A 3.3 V/1700 mA)

Dimension and Environment

Dimensions	Body Φ 45.5 X 49.3 mm, Bracket Φ 71.2 X 10.9 mm
Operating Temperature	-10 ~ 45° C
Operation Humidity	>95% RH

Ordering Information

Model	SI-108 IR controller, Z-wave Plus
-------	-----------------------------------

Standard Package

Package Size	11.2 * 11.2 * 6.3 cm
Product Weight	0.074 kg
Package Weight	0.145 kg
Package Content	SI-108 * 1