
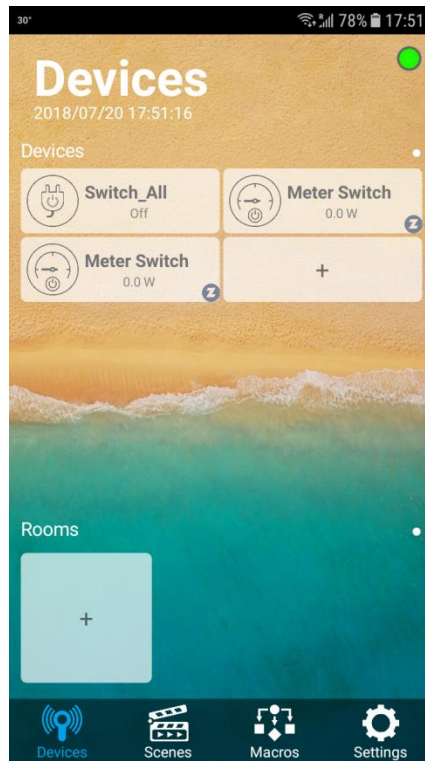


Q: How to use Switch All function with Smartplug and SmartLife Plus App

A: Please follow the below guide on how to add and remove Smartplug's from the Switch All Button.

When adding a Smartplug (SP-101) or In-Wall Switch (SA-102) to the Gateway the Airlive SmartLife Plus App will display several new icons. The icon " Meter Switch" is the Smartplug. The Icon "Switch_All" is automatically added the moment a switching device is added like a Smartplug or In-Wall switch and will only be displayed ones, even when there is more than Smartplug added.

The function of "Switch_All" is to let you switch all Smartplugs/In-Wall Switches ON or OFF at the same time.

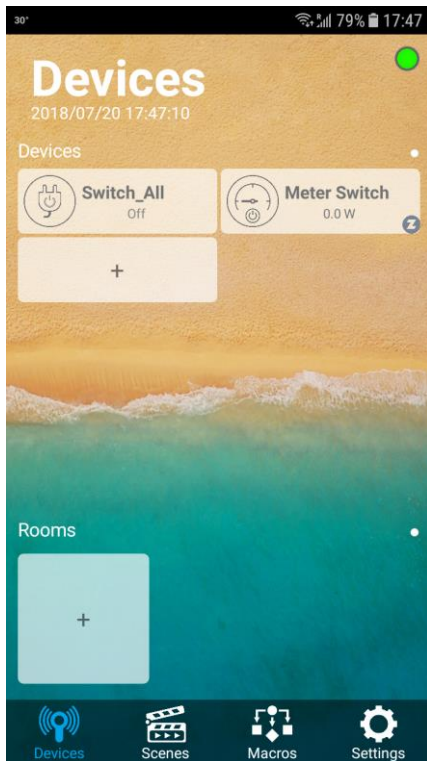

When you would like to remove or change the default setting of the “Switch_All” then this is possible. By default any Smartplug In-Wall Switch is added to the Switch_All with the both ON and OFF settings. These settings can be changed. For example the Smartplug can be removed from the “Switch_All” ON function but still work on the “Switch_All” OFF function.

To change press the Meter Icon on the Smartplug you want to change. A new page will open and now click on “Switch Mode >” You can now change the setting to your desired configuration when pressing the “Switch_All” button.

